





WEH

ESCO

MaxDRP™ Plus
Replacement Tooth System
For Caterpillar Style J-Series

MaxDRP™ Plus replacement points for J-Series

Designed for safety and ease of use, ESCO's MaxDRP Plus system utilizes a standard wrench on a unique hammerless pin and collar locking system. Caterpillar style assemblies are easily converted to MaxDRP Plus teeth with no modification to the existing adapter. In addition, ESCO alloys and enhanced point profiles provide exceptional performance.

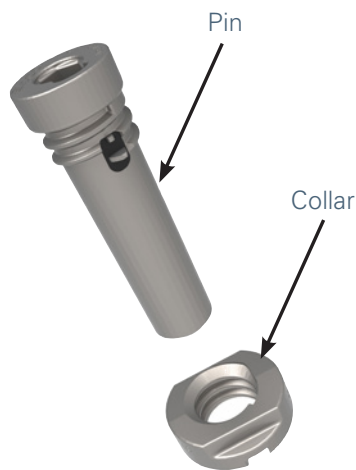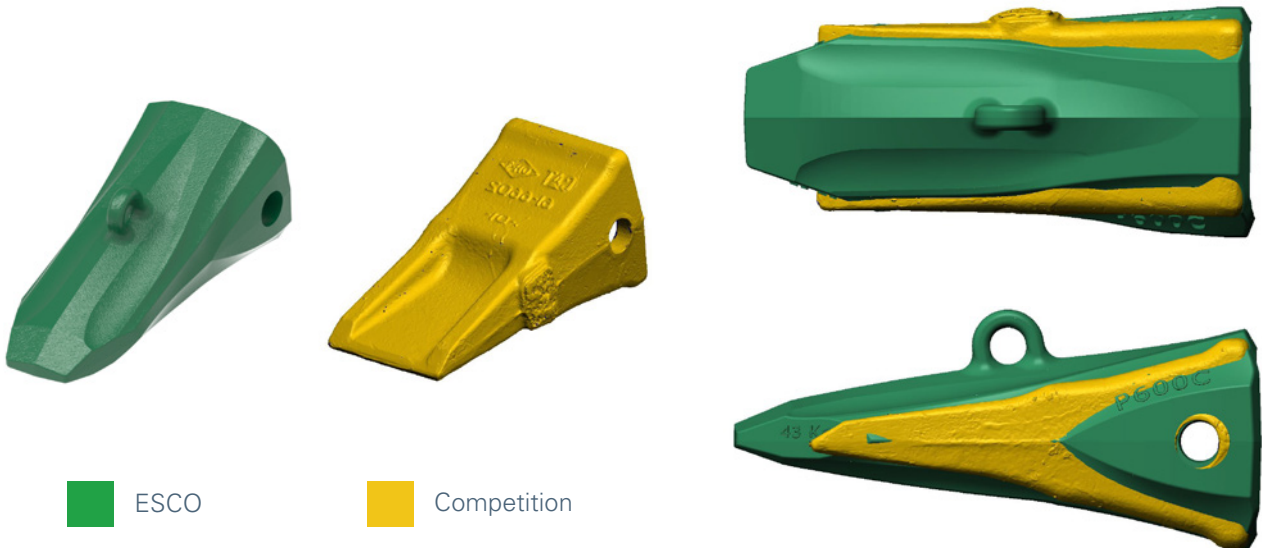

Up to 25% longer wear life with MaxDRP Plus replacement teeth

Optimized point shapes improve penetration with a higher percentage of wear metal with less throwaway weight.


MaxDRP Plus benefits

- Hammerless lock for easier and safer point replacement
- Slimmer point profile improves loading and wear life
- Reusable locking system reduces inventory, saves money
- No change to adapter or special tool required


Superior field-proven alloys

ESCO alloys have the best balance of the two main things you want in a tooth: toughness and hardness. Superior hardness provides maximum wear resistance and toughness withstands severe impact for longer tooth life. While some competitors may come close on one of these measures, no manufacturer can offer you both like ESCO.

ESCO



Competition



Typical Brinell Hardness



ESCO proprietary alloys

- Higher hardness provides greater wear resistance
- Increased toughness delivers unsurpassed reliability
- Consistent performance you can trust

Available in a broad range of sizes and select point shapes, MaxDRP Plus teeth can be installed on existing J-Series adapters with no modification.



AP/APL style



C style



P style



S style



T style

MaxDRP™ Plus Replacement Tooth Options

SYSTEM SIZE	PMID	DESCRIPTION	LENGTH		BIT WIDTH		WIDTH AT REAR		WEIGHT		PIN	LOCK	MACHINE
			mm	in	mm	in	mm	in	kg	lb			
J450/ J460*	P450P	Pick Point	354	13.93	19	0.75	142	5.59	11	23	P450LPN	P450LC	Excavator
	P450T	Twin Pick Point	353	13.91	180	7.07	143	5.63	14	30	P450LPN	P450LC	Excavator
	P450C	Chisel Point	337	13.26	55	2.18	144	5.68	13	29	P450LPN	P450LC	Excavator
	P450S	Standard Point	305	11.99	130	5.10	141	5.57	12	26	P450LPN	P450LC	Exc/FEL
	P450AP	Abrasion Point	352	13.86	72	2.82	144	5.67	21	45	P450LPN	P450LC	FEL
J550	P550P	Pick Point	406	15.97	23	0.89	166	6.55	17	37	P550LPN	P550/PR450LC	Excavator
	P550T	Twin Pick Point	406	15.98	204	8.03	167	6.57	21	46	P550LPN	P550/PR450LC	Excavator
	P550C	Chisel Point	379	14.91	71	2.78	168	6.60	21	46	P550LPN	P550/PR450LC	Excavator
	P550S	Standard Point	358	14.09	152	5.99	167	6.59	19	43	P550LPN	P550/PR450LC	Exc/FEL
	P550AP	Abrasion Point	409	16.12	84	3.29	169	6.67	33	73	P550LPN	P550/PR450LC	FEL
J600	P600C	Chisel Point	465	18.31	88	3.48	209	8.22	42	92	P600LPN	P600LC	Excavator
	P600AP	Abrasion Point	514	20.23	104	4.08	207	8.16	61	135	P600LPN	P600LC	FEL
J700	P700C	Chisel Point	498	19.59	92	3.63	219	8.63	51	112	P700LPN	P700/PR500LC	Excavator
	P700AP	Abrasion Point	514	20.23	110	4.32	216	8.52	70	154	P700LPN	P700/PR500LC	FEL
J800	P800C	Chisel Point	584	23.00	110	4.32	255	10.03	81	179	P800LPN	P800/PR550LC	Excavator
	P800APL	Abrasion Point	508	21.63	157	6.20	257	10.13	94	207	P800LPN	P800/PR550LC	FEL

*P450LPN fits J460 adapters with 25 mm (1.0 in) pin holes.



ESCO Group LLC – A Weir Group Division
2141 NW 25th Ave,
Portland, OR 97210
USA

www.esco.weir

P3015CON-ENG-L0820

Copyright © 2020, ESCO Group LLC. All rights reserved.